

MARENGO™ PAVERS

SADDLING AREAS / BARN AISLE WAYS / SERVICE ROADS
BAYS / BREEDING SHEDS



Private Residence - Waco, Texas



Marengo's attractive rubber pavers are ideal for barn aisle ways, breeding sheds, saddling areas service roads and other areas where durability and safety are desirable. *Photos left to right:*

Private Facility, Waco, Texas. Riding Stable, Boulder, Colorado.

Private Facility, Los Gatos, California.

MARENGO™

EQUINE FLOORING SYSTEMS

203 6th Avenue, Marengo, Illinois 60152 815.236.1563 marengoequine.com

MARENGO™ PAVERS

SADDLING AREAS / BARN AISLE WAYS / SERVICE ROADS
BAYS / BREEDING SHEDS

Marengo™ Pavers Test Results

Weight: 7/8" 8.51lb/ft² (41.5 kg/m²)
Weight: 1 3/4" 17.0lb/ft² (83.0 kg/m²)

Standard Tolerances: ± 1/16"


ASTM D412
Tensile Strength: 140lb/in² min.

ASTM D624
Tear Strength: 50lb/in min.

ASTM DD3389
Abrasion Resistance:
Less than 1g loss after 1,000 cycles

Marengo™ Pavers available in
7/8"-1 3/4" thicknesses.


Thicker rubber provides more
cushioning as desired.

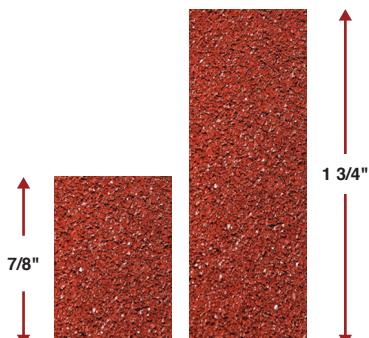

1 Recycled SBR
Made from 100% recycled
SBR (Styrene-Butadiene Rubber)

2 Adhesive Layer

3.42 Pavers = 1 Square Foot
7 Pavers Shown



Marengo™ Pavers
Non-laminated, single ply
interlocking paver system.



Marengo™ Pavers Color Options



Actual colors may vary slightly
from color samples.

MARENGO™
EQUINE FLOORING SYSTEMS

203 6th Avenue, Marengo, Illinois 60152
lee@marengoequine.com
cameron@marengoequine.com
815.236.1563 marengoequine.com

