

MARENGO™ SEAMLESS

STALLS / WASH RACKS / AISLE WAYS / LIVESTOCK TRAILERS



Six S Ranch - Declo, Idaho



Marengo seamless, non-porous, systems create equine environments that remain beautiful for years. Our sustainable surfaces are safe, comfortable, easy to maintain and slip-free. Available in a variety of colors & varying degrees of cushioning. Photos left to right: Six S Ranch, Declo, Idaho. Private facility, Kenwood, California. Private facility, Waco, Texas

MARENGO™

EQUINE FLOORING SYSTEMS

203 6th Avenue, Marengo, Illinois 60152 815.236.1563 marengoequine.com

MARENGO™ SEAMLESS

STALLS / WASH RACKS / AISLE WAYS / LIVESTOCK TRAILERS

Marengo™ Seamless Test Results

STM D2240 Test - Durometer
Indentation Hardness: 50

ASTM D4060
Abrasion Resistance: Taber Abraser
Abrasion Wheel: H-18
Load applied: 1,000 Grams

Number Cycles: 1,000
Original Weight: 91.26 Grams
Final Weight: 90.70 Grams
Weight Loss: 0.56 Grams (0.61%)

ASTM F2753 Rolling Load
500 Cycles: 0.002 Inch
Floor sample was intact, slight gloss change to surface, no visible indentation.


ASTM F2569 Force Reduction
Drop 2: 24.6%
Drop 3: 24.2%
Average of 2 & 3: 24.4%

ASTM F2157 Deformation
Drop 2: 1.1MM
Drop 3: 1.0MM
Average of 2 & 3: 1.1MM

*** ASTM D412**


Breaking Load and Elongation
70 Degrees and 65% RH
Thickness: .5"

Specimen	Breaking Load	Elongation	Tensile
1	54.14 LBS	538.46%	218.7 LBS / SQ Inch
2	65.65 LBS	657.33%	265.3 LBS / SQ Inch
3	67.90 LBS	792.44%	274.3 LBS / SQ Inch
4	49.23 LBS	657.49%	198.9 LBS / SQ Inch
5	72.41 LBS	719.38%	292.6 LBS / SQ Inch
Averages	61.87 LBS	673.02%	250.0 LBS / SQ Inch



Base Layer Available in
9mm-18mm thicknesses.
Thicker rubber base layer provides
more cushioning as desired.

- 1** Gloss Top Coat Layer
Textured with Quartz
- 2** Durable Wear Coat Layer
- 3** Second Seal Coat with
Fiberglass Mesh Inlay
- 4** Seal Coat Layer
- 5** Rubber Base Layer
- 6** Adhesive Layer

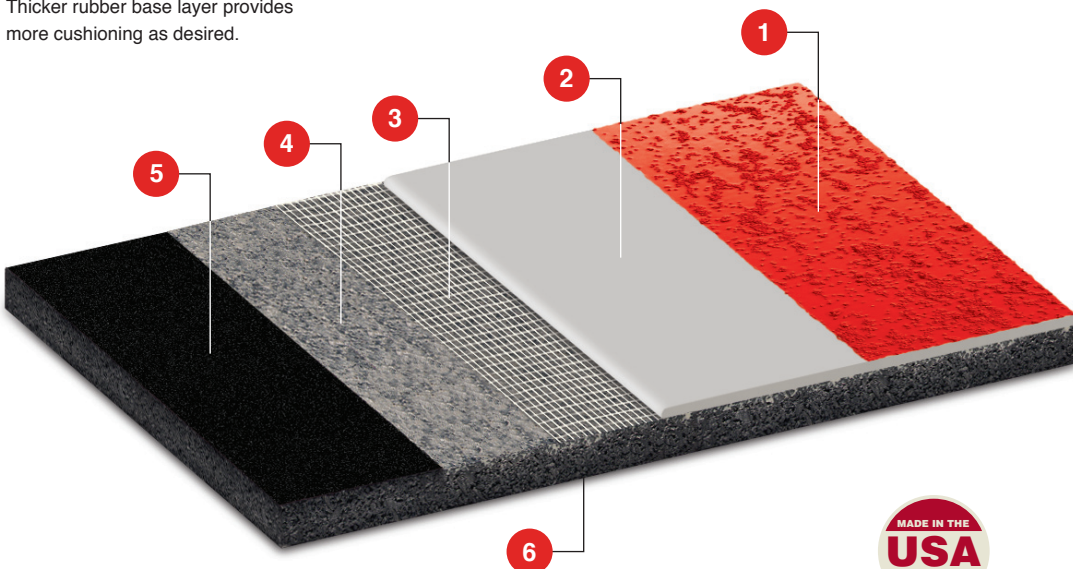

Marengo™ Seamless Color Options Solvent Base

Light Grey



Dark Grey



Charcoal



Black



Blue



Tan



Dark Green



Marengo™ Seamless Color Options VOC Compliant

Light Grey



Dark Grey



Charcoal



Black



Oxide Red



Actual colors may vary slightly from color samples.
Slight variations may occur due to jobsite conditions,
mixing proportions and installation methods. Standard
colors will vary by product. Consult your representative
for further information.

MARENGO™
EQUINE FLOORING SYSTEMS

203 6th Avenue, Marengo, Illinois 60152
lee@marengoequine.com
cameron@marengoequine.com
815.236.1563 marengoequine.com

